

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 August 2003 (28.08.2003)

PCT

(10) International Publication Number
WO 03/070059 A1

(51) International Patent Classification⁷: **A47B 91/16, A47C 7/00**

(74) Agents: HEDLEY, Nicholas, James, Matthew et al.; Kilburn & Strode, 20 Red Lion Street, London WC1R 4PJ (GB).

(21) International Application Number: PCT/GB03/00753

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 21 February 2003 (21.02.2003)

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:
0204075.6 21 February 2002 (21.02.2002) GB
0214657.9 25 June 2002 (25.06.2002) GB

(71) Applicant (for all designated States except US): ROYAL COLLEGE OF ART [GB/GB]; Kensington Gore, London SW7 2EU (GB).

Published:
— with international search report

[Continued on next page]

(54) Title: SELF-STABILISING SUPPORT

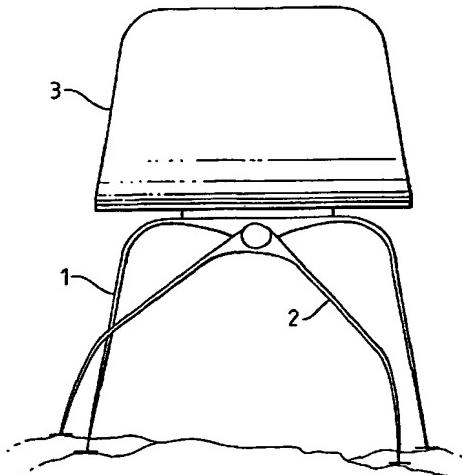

WO 03/070059 A1

(57) Abstract: A self-stabilising support for a structure, e.g. a chair, is disclosed, which comprises: a first pair of legs (1), means connected to the first pair of legs for supporting the structure, e.g. the upper part of the chair (3); a second pair of legs (2); a bearing acting between the first pair of legs (1) and the second pair of legs (2) and allowing the second pair of legs to pivot with respect to the first pair of legs about an axis whereby the four legs of the first and second pair can, by suitably pivoting the second pair of legs with respect to the first pair, be firmly planted on an uneven surface to support the said structure. The bearing is damped so that it does not resist sudden movement between the first and the second legs about the bearing but a sustained force causes pivoting movement of the second pair of legs about the bearing.